


PG-241609 Series

OUTLINE DIMENSION

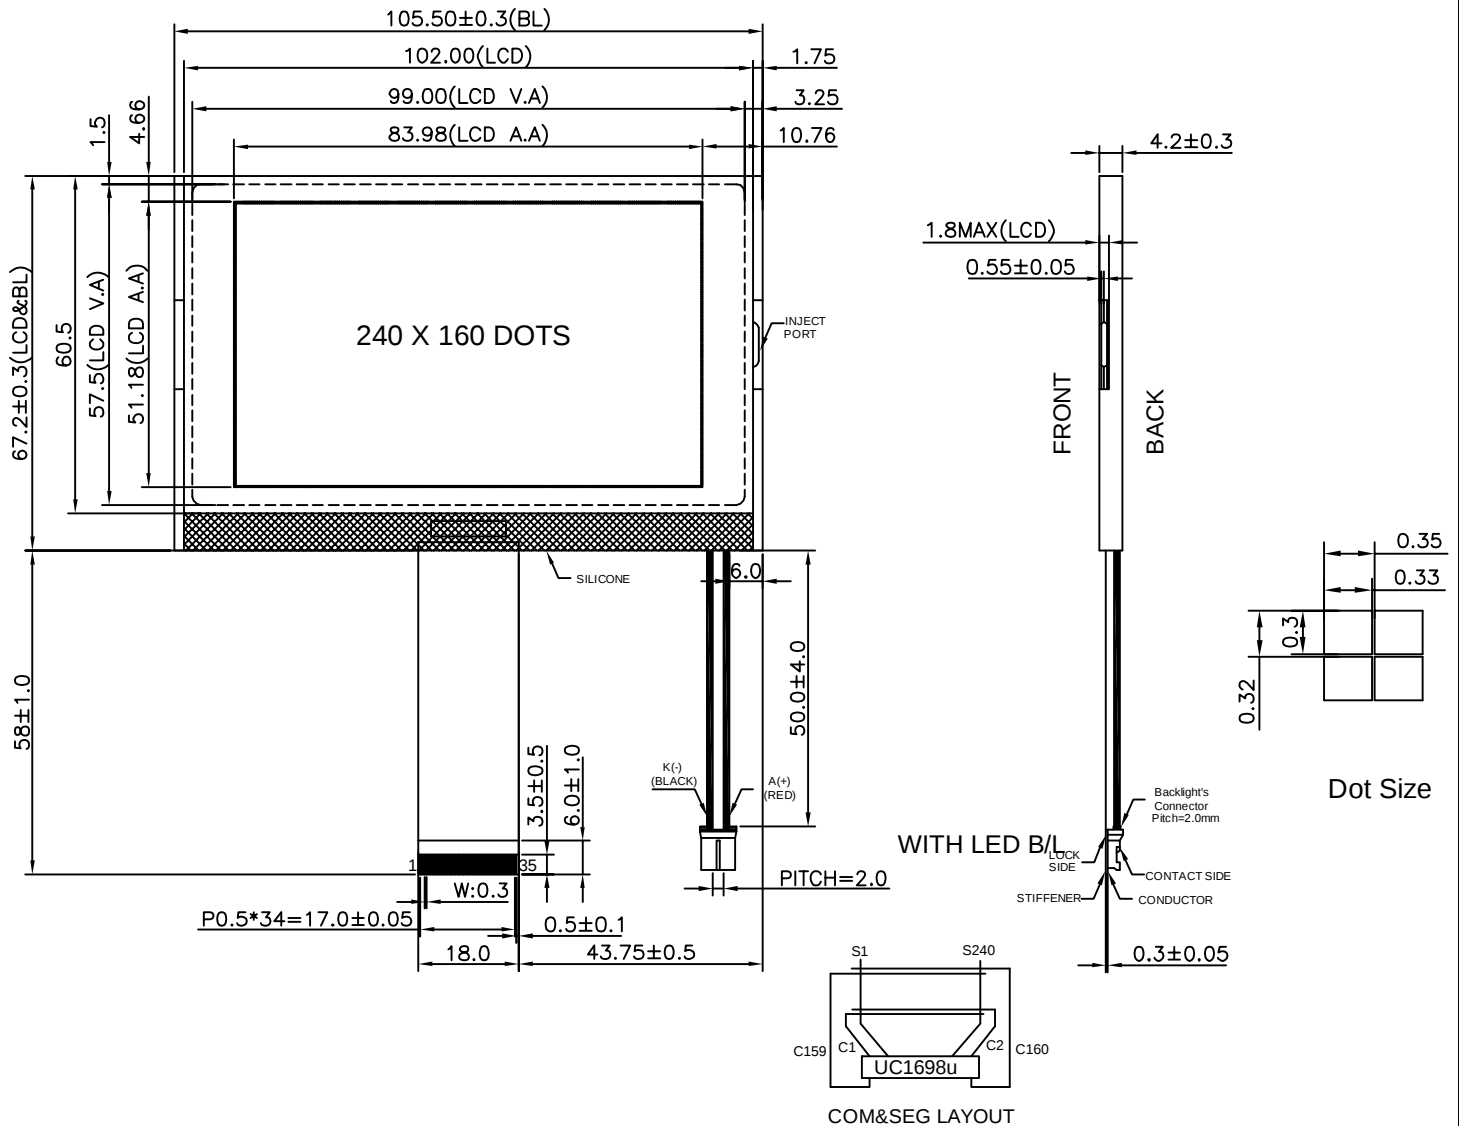

MECHANICAL DIMENSION

Overall Dimension (mm)	105.5 X 67.2 X 4.2
Viewing Area (mm)	99.0 X 57.5
Format	240 SEG X 160 COM
Dot Size (mm)	0.33 X 0.30
Dot Pitch (mm)	0.35 X 0.32

ELECTRICAL CHARACTERISTICS (VDD=5.0V ; Top=25° C)

Parameter	Symbol	MIN	Typical	MAX	Unit
Power Supply Voltage	Vdd-Vss		3.3		V
LCD Operating Voltage	Vop		16.0		V
LCM Current Consumption	Idd				mA
Backlight Current Consumption	LED (Edge)				mA
	LED (Array)				mA
Driving Method	1/160 Duty 1/12 Bias				

NOTES

IC Controller / Driver:
LCD :

Backlight :

Viewing Angle:

Operating Temperature :

Storage Temperature :

UC1698u (or Compatible)
FSTN, Y/G STN Negative FSTN,
Negative FFSTN
White LED, YELLOW-GREEN LED
6:00, 12:00
-20° C ~ +70° C
-30° C ~ +80° C

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	MIN	MAX	Unit
Supply Voltage for Logic	Vdd-Vss	-0.3	3.3	V
Supply Voltage for LCD	Vlcd	6.15	18	V
Input Voltage	Vin			V

PIN ASSIGNMENT

Pin No.	Symbol	Pin No.	Symbol
1	VLCD	19	RST
2	VS+	20	D0
3	VS-	21	D1
4	VB0-	22	D2
5	VB1-	23	D3
6	VB1+	24	D4
7	VB0+	25	D5
8	VDD	26	D6
9	VSS	27	D7
10	ID1	28	D8
11	ID0	29	D9
12	TST4	30	D10
13	BM1	31	D11
14	BM0	32	D12
15	CS0	33	D13
16	CD	34	D14
17	WR1	35	D15
18	WR0		