

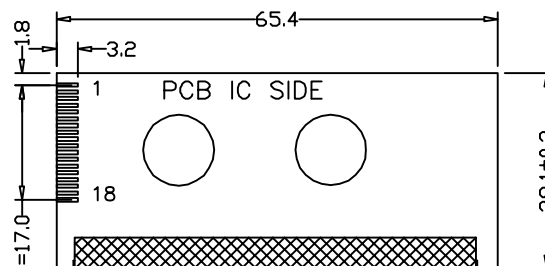
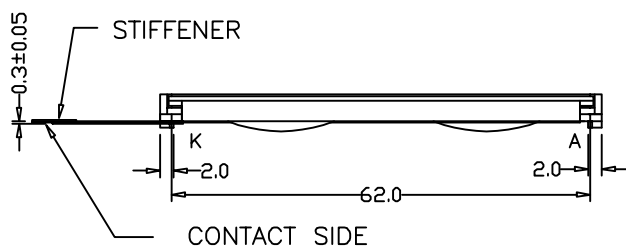



PG-120322 Series

OUTLINE DIMENSION

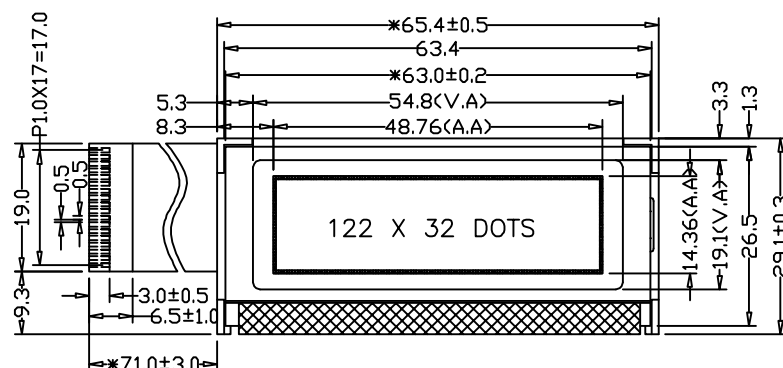

MECHANICAL DIMENSION	
Overall Dimension (mm)	65.4 X 29.1 X 6.0/6.5
Viewing Area (mm)	54.8 X 19.1
Format	122 SEG × 32 COM
Dot Size (mm)	0.36 X 0.41
Dot Pitch (mm)	0.40 X 0.45



Dot Size

ABSOLUTE MAXIMUM RATINGS				
Parameter	Symbol	MIN	MAX	Unit
Supply Voltage for Logic	Vdd-Vss	-0.3	+8.0	V
Supply Voltage for LCD	Vlcd	Vdd - 16.5	Vdd + 0.3	V
Input Voltage	Vin	Vdd - 0.3	Vdd + 0.3	V

ELECTRICAL CHARACTERISTICS (VDD=5.0V ; Top=25° C)					
Parameter	Symbol	MIN	Typical	MAX	Unit
Power Supply Voltage	Vdd-Vss		5.0		V
LCD Operating Voltage	Vop		4.5		V
LCM Current Consumption	Idd				mA
Backlight Current Consumption	LED (Edge)				mA
	LED (Array)				mA
Driving Method	1/32 Duty 1/5 Bias				

NOTES

IC Controller / Driver:

LCD Options:

Backlight Options:

Viewing Angle:

Operating Temperature :

Storage Temperature :

PT6520 or Equivalent

Y/G STN,Gray STN

Y/G LED,Amber LED

6:00

-20° C - +70° C

-30° C - +80° C

PIN ASSIGNMENT		
Pin No.	Symbol	Function
1	VDD	Power Supply (GND)
2	VSS	Power Supply (+)
3	V0	Contrast Adjust
4	RST	
5	E1	Enable Signal 1
6	E2	Enable Signal 2
7	R/W	Data Read / write
8	A0	Register select signal
9	DB0	Data Bus Line
10	DB1	Data Bus Line
11	DB2	Data Bus Line
12	DB3	Data Bus Line
13	DB4	Data Bus Line
14	DB5	Data Bus Line
15	DB6	Data Bus Line
16	DB7	Data Bus Line
17	LEDK	Power Supply for LED B/L (-)
18	LEDA	Power Supply for LED B/L (+)